


QuickField simulation report

Bandpass filter

Calculation of the filter transfer function

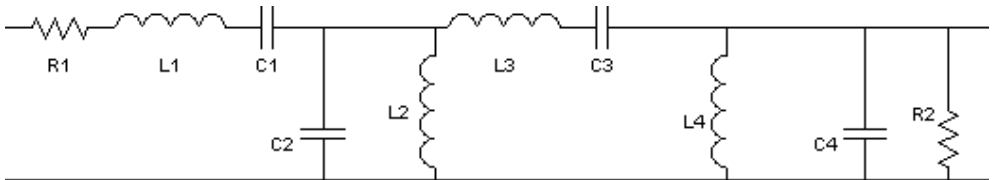

This automatically generated document consists of several sections, which specify the problem setup and finite element analysis simulation results. Navigation links in the top of each page lead to corresponding sections of this report.

Problem description and QuickField simulation files:

<https://quickfield.com/advanced/circuit3.htm>

Problem info

Problem type: AC Magnetics , frequency: 40000 Hz,

Geometry model class: Plane-Parallel

Problem database file names:

- Problem: *Circuit3.pbm*
- Geometry: *Circuit3.mod*
- Material Data: *Circuit3.dhe*
- Material Data 2 (library): *none*
- Electric circuit: *Circuit3.qcr*

Results taken from other problems:

- *none*

Geometry model

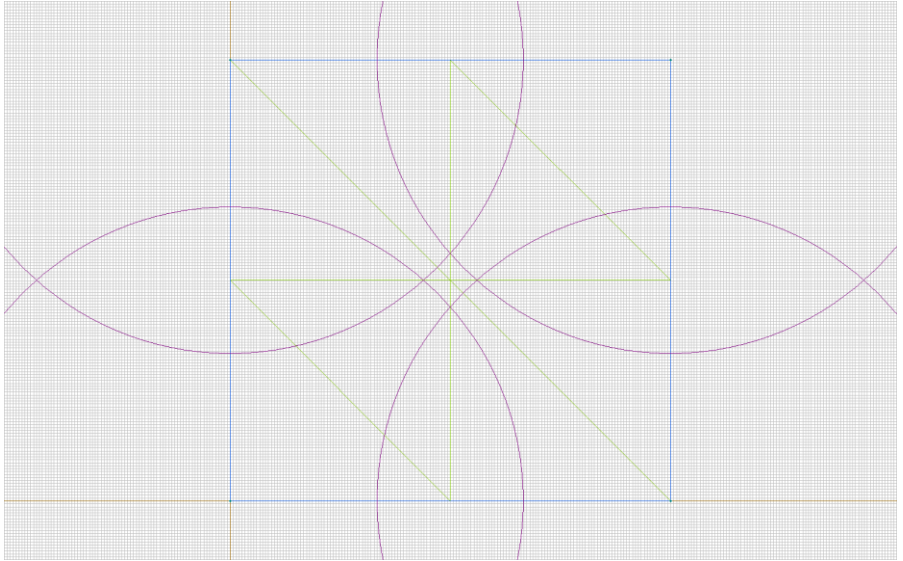



Table 1. Geometry model statistics

	With Label	Total
Blocks	1	1
Edges	1	4
Vertices	1	4

Number of nodes: 9.

Electric circuit

Coupled electric circuit

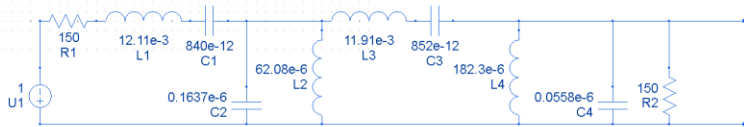

Circuit elements:

Voltage source U1=1 [V] 0 [deg]

Inductor L1=0.01211 [H]

Capacitor C2=0.0000001637 [F]

Resistor R1=150 [Ohm]

Capacitor C1=0.00000000084 [F]

Inductor L2=0.00006208 [H]

Inductor L3=0.01191 [H]

Capacitor C3=0.000000000852 [F]

Inductor L4=0.0001823 [H]

Capacitor C4=0.0000000558 [F]

Resistor R2=150 [Ohm]

Labelled objects

There are following labelled objects in the geometry model (Material Data file could contain more labels, but only those labels that assigned to geometric objects are listed)

Blocks:

- [load](#)
-

Edges:

- [a0](#)
-

Vertices:

- [output voltage](#)
-

Detailed information about each label is listed below.

Labelled objects: block "load"


There are (1) objects with this label

Relative magnetic permeability: $\mu_x=1$, $\mu_y=1$

Electric conductivity: $\sigma=0$ [S/m]

Current density: $j=0$ [A/m²], phase 0 [deg]


Conductor's connection: in parallel

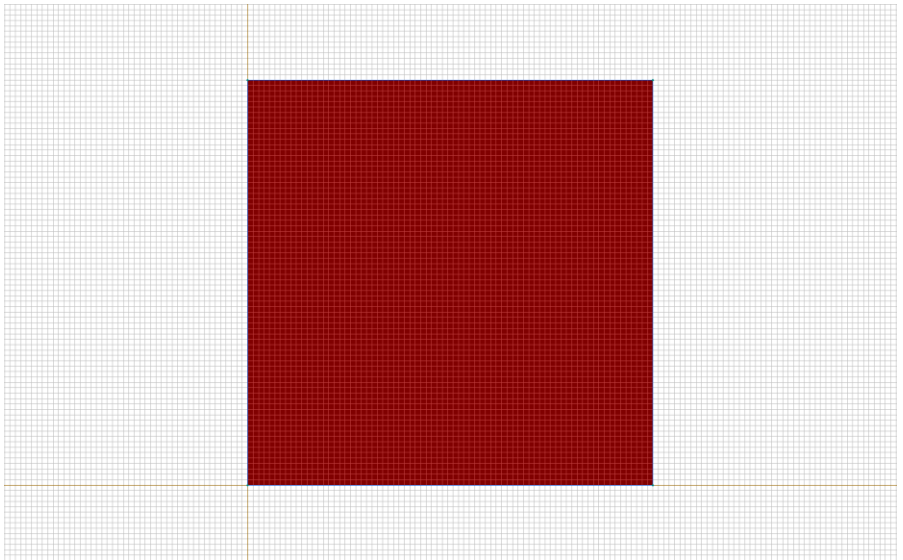

Labelled objects: edge "a0"

There are (4) objects with this label


Magnetic potential: $A=0$ [Wb/m], phase 0 [deg]

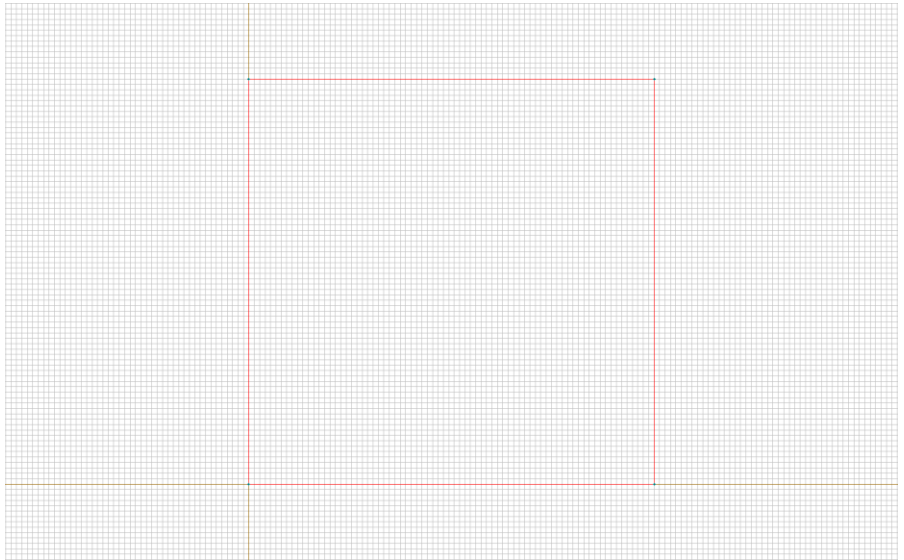

Labelled objects: vertex "output voltage"

There are (1) objects with this label

No material data (boundary conditions) are specified

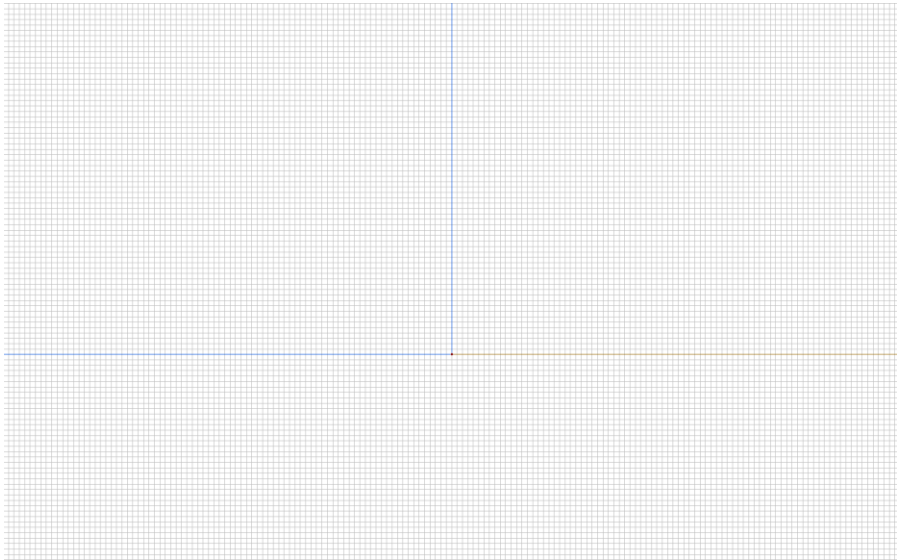

[Problem info](#)

[Geometry model](#)

[Labelled Objects](#)

[Results](#)

[Nonlinear dependencies](#)


Results

Field lines



Results

Electric circuit currents

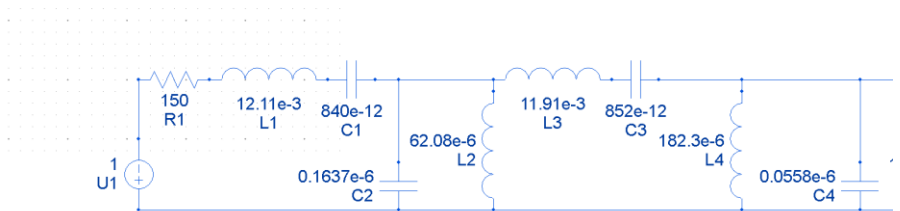

Circuit elements:

U1. I=0.0006042 [A], phase=84.8 [deg]

L1. I=0.0006042 [A], phase=-95.2 [deg]

C2. I=0.0011133 [A], phase=-95.26 [deg]

R1. I=0.0006042 [A], phase=-95.2 [deg]

C1. I=0.0006042 [A], phase=-95.2 [deg]

L2. I=0.0017343 [A], phase=84.74 [deg]

L3. I=0.000016871 [A], phase=82.47 [deg]

C3. I=0.000016871 [A], phase=82.47 [deg]


L4. I=0.00003588 [A], phase=-138.04 [deg]

C4. I=0.000023055 [A], phase=41.96 [deg]

R2. $I=0.00001096$ [A], phase= 131.96 [deg]

Results

Color map of Strength $|H|$ [A/m]

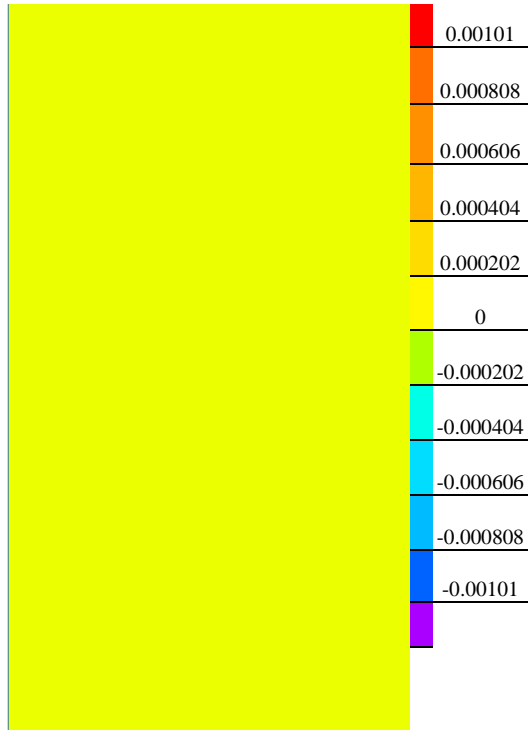

Nonlinear dependencies

No non-linear dependencies are used in this problem data

[Problem info](#)

[Geometry model](#)

[Labelled Objects](#)

[Results](#)

[Nonlinear dependencies](#)